
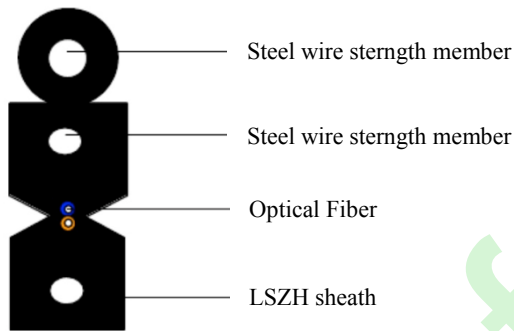


# PRODUCT INTRODUCTION

## Bow-type drop cable for accsee

GJYXCH-XB6a2

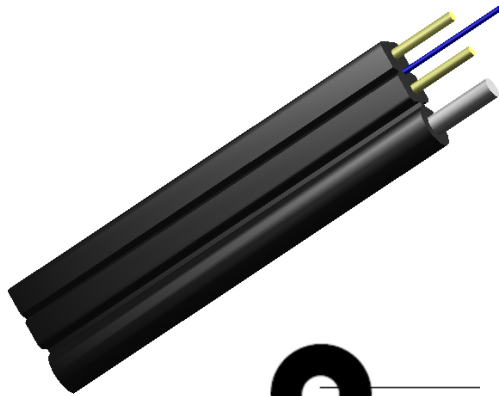

### FEATURES

- Low transmission loss
- Small size and light weight
- easy construction
- Steel wire strength member
- Environmentally stable
- has good compression, tensile and anti aging properties

### APPLICATIONS

- Telecommunications
- Local area network
- Fiber to the home
- Fiber optic sensors
- Testing instruments

### PERFORMANCE SPECIFICATIONS

ITEM	Bow-type drop cable for accsee			
	GJXFH-1B6a2	GJXFH-2B6a2	GJXFH-3B6a2	GJXFH-4B6a2
Cable specification	5.2×2.0mm		6.2×2.0mm	
Fiber type	9/125 um (G657A)			
Fiber counts	1	2	3	4
Fiber color	Natural	Blue, orange	Blue, orange, green	Blue, orange, green, brown
Sheath color	Black or White			
Sheath material	LSZH			
Cable dimension	5.2(±0.1)*2.0(±0.1) mm		6.2(±0.1)*2.0(±0.1) mm	
Cable weight	Approx. 19 Kg/km		Approx. 22 Kg/km	
transmission loss	≤ 0.4 at 1310nm, ≤ 0.3 at 1550nm			
Min. bending radius	30mm(Static) 50mm(Dynamic)			
Short term tensile	1000N			
Crush resistance	2200 N/100mm			
Operation temperature	-40~+60 °C			
Storage temperature	-45~+70 °C			

# Bow-type drop cable for accsee

## ORDERING INFORMATION

GJYXCH-□□-B6-□□

Fiber counts

- 1 .....1 CORE
- 2 .....2 CORES
- 3 .....3 CORES
- 4 .....4 CORES

G657A Type Optical fiber

Optical fiber Type

- a1.....G657a1 Type
- a2.....G657a2 Type

